



RoHS

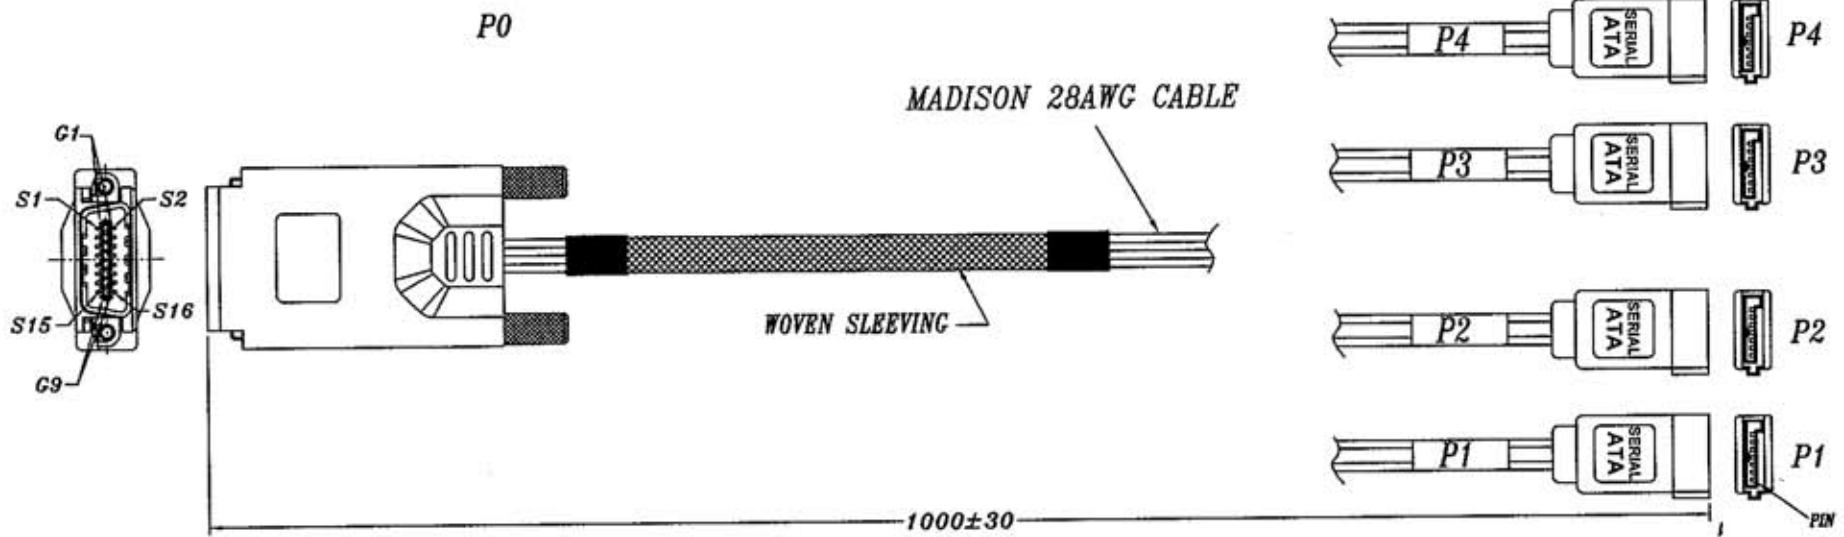

MATERIAL RoHS COMPLIANT:

- 1. CABLE:**
ELECTRICAL:
 IMPEDANCE: 100±5 ohm(DIFFERENTIAL TDR)
 CAPACITANCE: 14pF/ ft NOMINAL
 TIME DELAY: 1.35ns/ ft NOMINAL
 SKEW(WITHIN PAIR): ≤120ps/ 7M MAXIMUM
 ATTENUATION (NOMINAL): 10 dB/ 7M MAXIMUM @1.25GHz
- APPROVALS:**
 UL AWM VW-1 80°C 30V, RoHS COMPLIANT



- 2. CONNECTOR:**
 P0: SAS 4x CABLE PLUG WITH THUMBSCREWS.
 (1)HOUSING- ZINC DIE CAST
 (2)CONTACTS- 30u" INCHES GOLD PLATING
 P1~P4: SATA CABLE RECEPTACLE CONNECTOR WITHOUT METAL SHELL



P/N: SA-70S7P-XX

Desc. : SAS4x (SFF-8470) - SATA (4x)