




1	2	3	4	5	6	7	8	9
REV.	REMARK	DATE	SIGN.					


RoHS

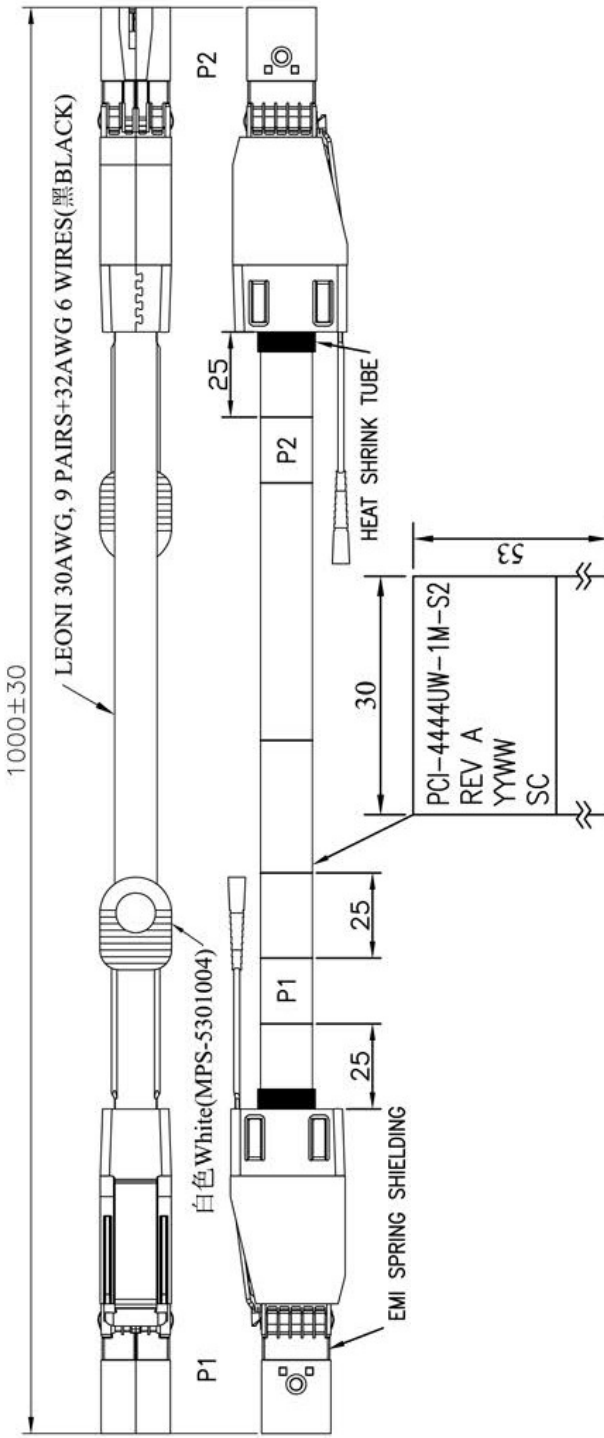

MATERIAL RoHS COMPLIANT:
 1. CABLE SPEC (LEONI ParaLink):
 9 PAIRS + 6 WIRES
 (1) 9 PAIRS/30AWG SILVER PLATED COPPER
 (2) 6 WIRES/32AWG TINNED COPPER
 OVERALL SHIELD
 (1) ALUMINATE FOIL OVERLAPPED
 (2) TINNED COPPER BRAID, 85% COVERAGE
 DIAMETER: 7.6±0.3mm
 JACKET: PVC, COLOR: BLACK
 ELECTRICAL:
 IMPEDANCE: 100±5 OHM (DIFFERENTIAL TDR)
 PRINT LEGEND: "LEONI High Speed Cables ParaLink®"
 100Q 9pairs 30AWG+ 6x32AWG "internal lot number"
 *sequential length in metres"

2.CONNECTOR:
 P1,P2: SFF-8644 CABLE PLUG
 (1) P.C.B: 4 LAYERS, GOLD PLATING ON CONTACT PADS, WITHOUT CARBON (P/N: MPCB-060003LF REV.B / MPCB-060004LF REV.B)
 (2) LATCH: STAINLESS STEEL
 (3) BACKSHELL- ZINC DIE CASTING HOOD/ NICKEL PLATING
 (4) PULL TAB: NYLON UL94V-0, COLOR: WHITE(MPS-5301004)
 (5) EMI SPRING SHIELDING

3. LABELING ON BAG:
 PCI-4444UW-1M-S2
 Made in Taiwan
 60



DESC.	SFF-8644 with Sideband Cable Assembly
P/N	B-5273
CUSTOMER P/N	PCI-4444UW-1M-S2


APPROVED	CHECKED	DESIGNED	TOLERANCE	SCALE	*	UNIT	mm
		Sino		DATE	09/03/15	DWG NO:	DWG\B\5273

1 2 3 4 5 6 7 8 9

REV.	REMARK	DATE	SIGN.

WIRING DIAGRAM

*客製化接點

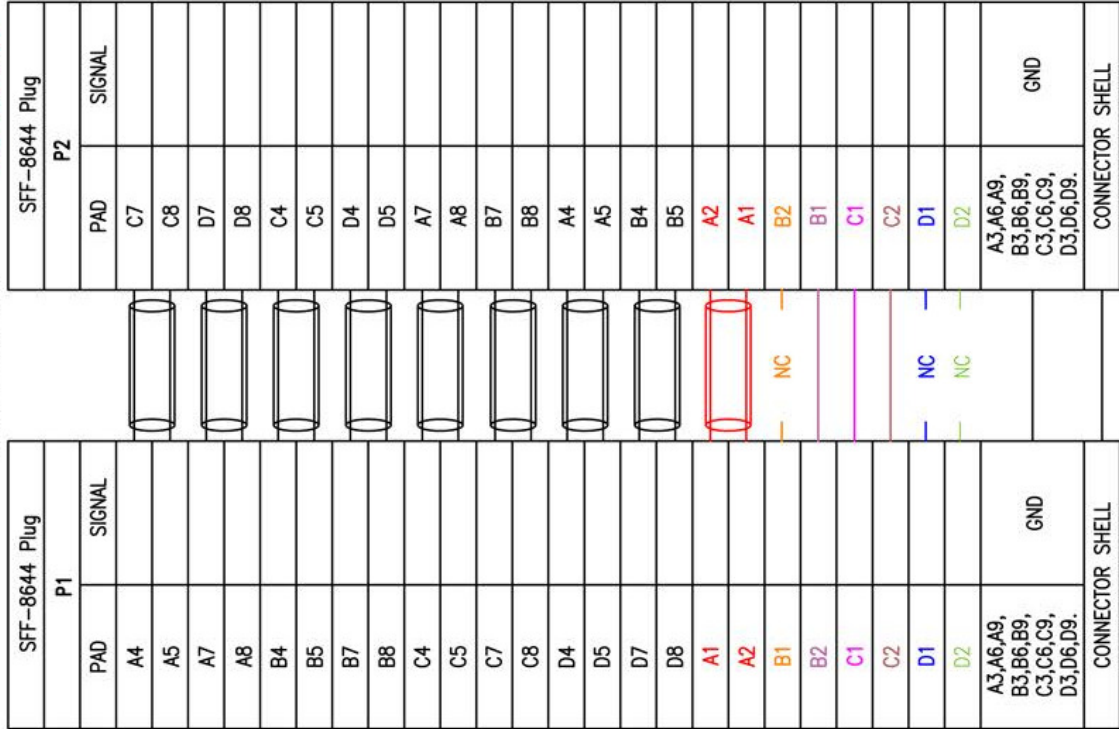

DESC.	SFF-8644 with Sideband Cable Assembly
P/N	B-5273
CUSTOMER P/N	PCI-4444UW-1M-S2

APPROVED	CHECKED	DESIGNED	TOLERANCE	SCALE	*	UNIT	mm
		Sino	*	DATE	09/03/15	DWG NO:	DWG\B\5273

1 2 3 4 5 6 7 8 9

F

E

D

C

B

A