




RoHS

REV.	REMARK	DATE	SIGN.

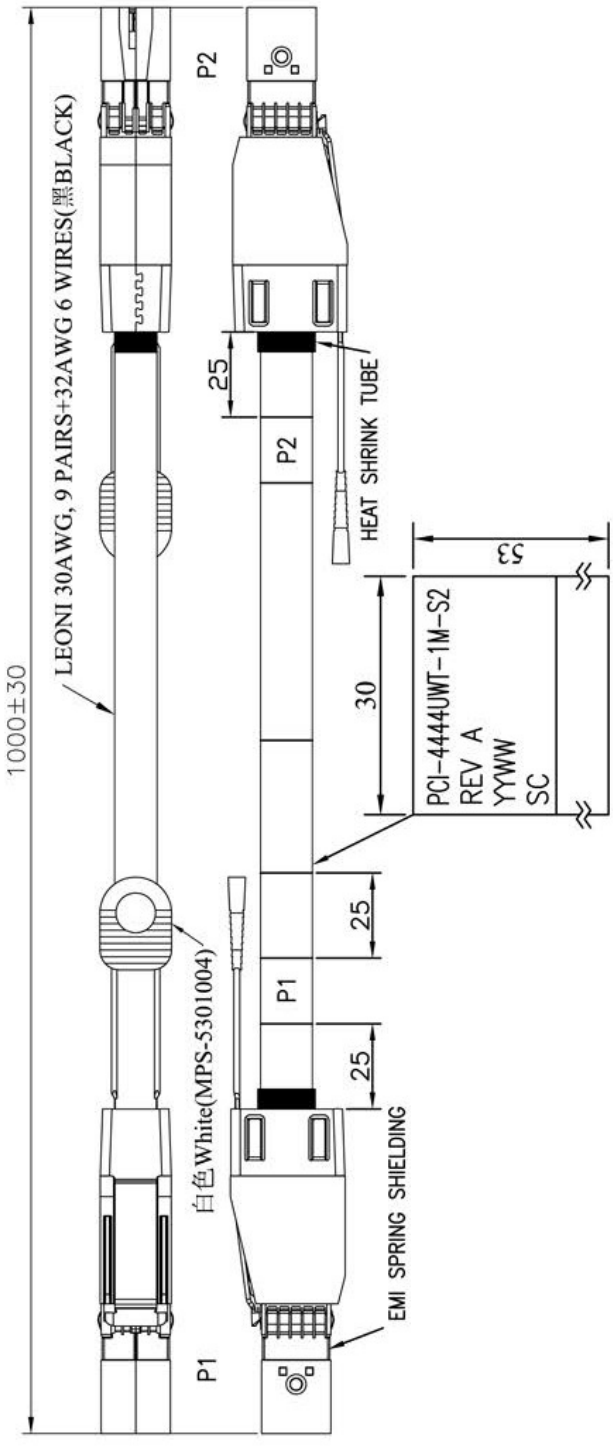


MATERIAL RoHS COMPLIANT:

- CABLE SPEC (LEONI ParaLink):
9 PAIRS + 6 WIRES
(1) 9 PAIRS/30AWG SILVER PLATED COPPER
(2) 6 WIRES/32AWG TINNED COPPER
- OVERALL SHIELD
(1) ALU LAMINATE FOIL OVERLAPPED
(2) TINNED COPPER BRAID, 85% COVERAGE
- DIAMETER: 7.6±0.3mm
- JACKET: PVC, COLOR: BLACK
- ELECTRICAL:
IMPEDANCE: 100±5 OHM (DIFFERENTIAL TDR)
PRINT LEGEND: "LEONI High Speed Cables ParaLink®"
100Q 9pairs 30AWG+ 6x32AWG "internal lot number"
"sequential length in metres"

2.CONNECTOR:

- P1,P2: SFF-8644 CABLE PLUG
(1) P.C.B: 4 LAYERS, GOLD PLATING ON CONTACT PADS, WITHOUT CARBON (P/N: MPCB-060003LF REV.B / MPCB-060004LF REV.B)
(2) LATCH: STAINLESS STEEL
(3) BACKSHELL - ZINC DIE CASTING HOOD/ NICKEL PLATING
(4) PULL TAB: NYLON UL94V-0, COLOR: WHITE(MPS-5301004)
(5) EMI SPRING SHIELDING

3. LABELING ON BAG:




DESC.	SFF-8644*2 with Sideband Cable Assembly
P/N	B-5653
CUSTOMER P/N	PCI-4444UWT-1M-S2

APPROVED	CHECKED	DESIGNED	TOLERANCE	SCALE	*	UNIT
		Sino				mm

DATE	07/15/16	DWG NO:	DWG\B\5653
------	----------	---------	------------

WIRING DIAGRAM *客製化接點

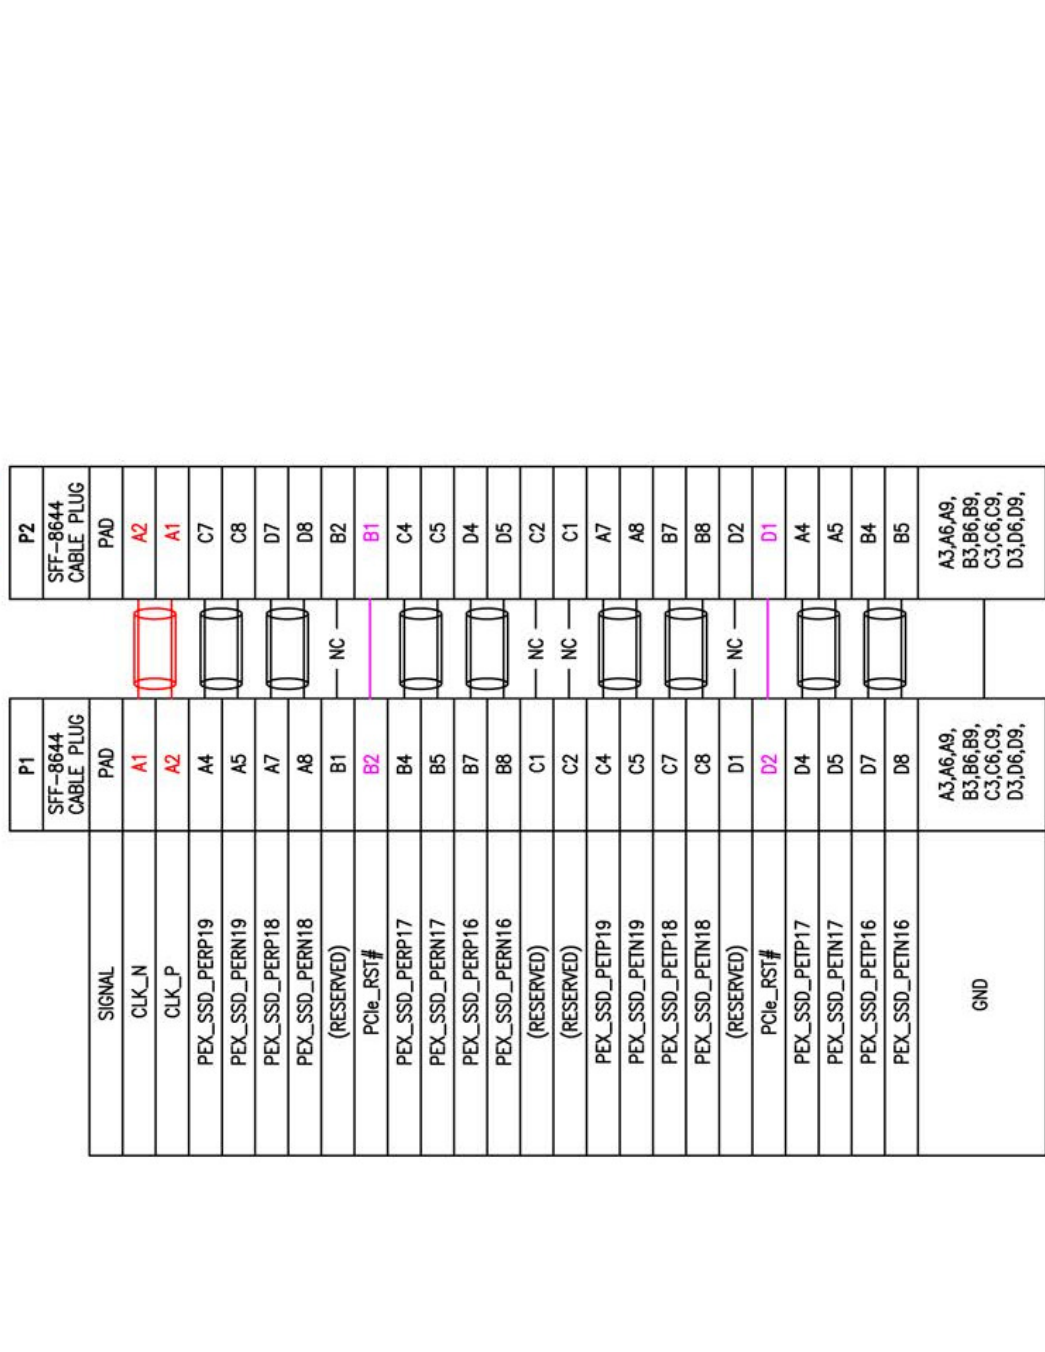

DESC.	SFF-8644*2 with Sideband Cable Assembly	APPROVED	CHECKED	DESIGNED	TOLERANCE	SCALE	*	UNIT	mm
	P/N B-5653			Sino		DATE 07/15/16	DWG NO: DWG\B\5653		

