

# TxRx connection general characteristics

2011.09.02


Item Tested	MiniSASHD4x to 16*SMA, Suhner EZ-47 73cm(except plug and jack)
Tester	Anritsu MS4644A
Tester Setting	Freq = 10MHz to 15GHz, Step = 10MHz

Sampled Pair = Tx2

SDD21



SDD12

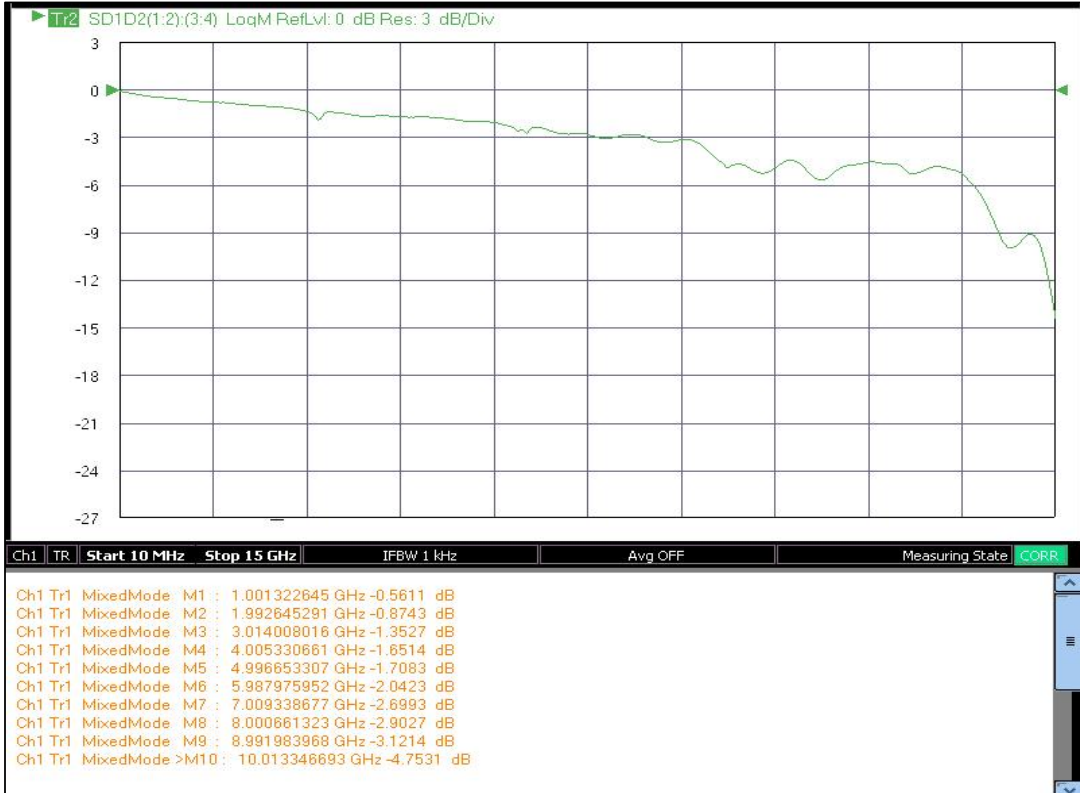


# TxRx connection general characteristics

2011.09.02

Item Tested	MiniSASHD4x to 16*SMA, Suhner EZ-47 73cm(except plug and jack)
Tester	Anritsu MS4644A
Tester Setting	Freq = 10MHz to 15GHz, Step = 10MHz

Sampled Pair = Tx2

SDD11

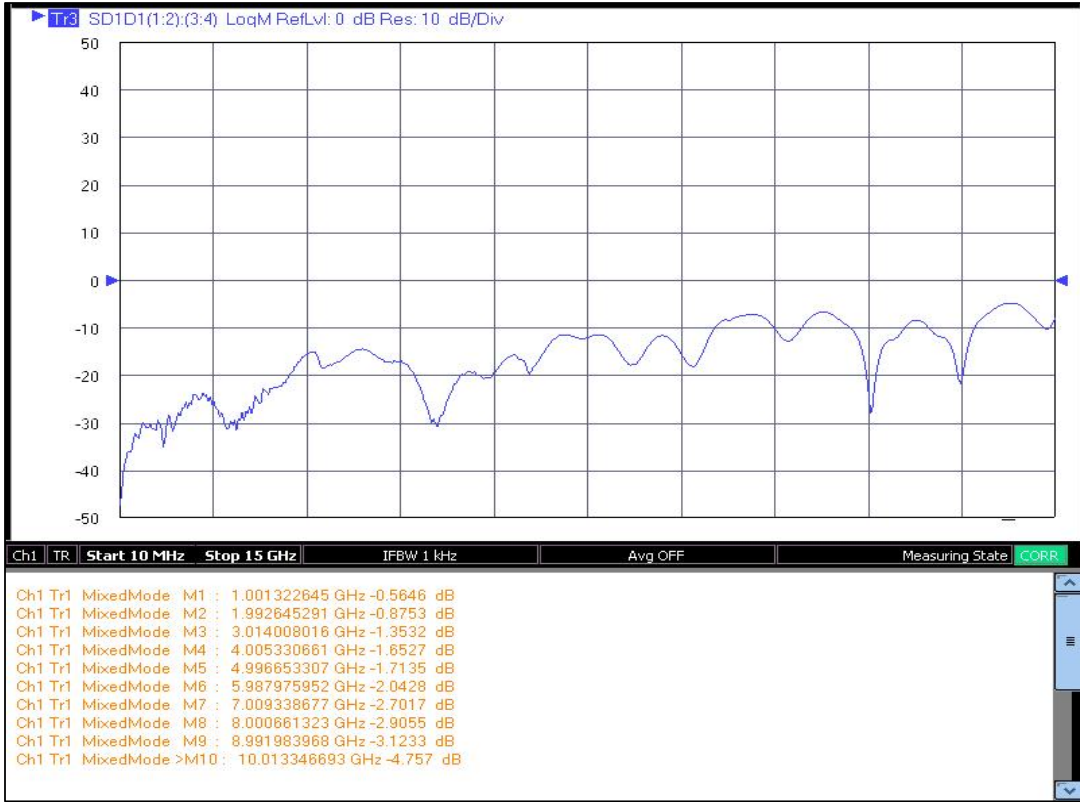

SDD22

