


The marking on this product doesn't contain environmental hazardous materials per directive 2011/65/EU for RoHS compliance.



REVISIONS

ECN NO.	REV.	DESCRIPTIONS	CHECKED	APPROVED	DATE
	REV.	AX1	JUSTIN	KASUN	11/03/2017
	AX2	CHANGE TO THE FORM OF CUSTOMER	JUSTIN	KASUN	11/08/2017
	AX3	ADD PN OF CUSTOMER IN LABEL	JUSTIN	KASUN	11/10/2017

- NOTE:
 1. THE CABLE ASSEMBLY SHALL MEET RoHS2.0 COMPLIANT.
 该产品通过RoHS2.0认证。
 2. EXCEPT IL ELECTRICAL AND MECHANICAL PERFORMANCE SHALL MEET THE SAS4.0(24G) INDUSTRIAL STARDAND.
 除衰减外电气和机械特性遵循SAS4.0(24G)工业标准。
 3. THE CABLE ASSEMBLY SHALL MEET IMPEDANCE REQUIREMENT:CONNECTORS:100±15 OHMS,CABLE AREA: 100±10 OHMS,
 该产品满足下面阻抗特性:连接器: 100±15欧姆, 线材区域: 100±10欧姆。

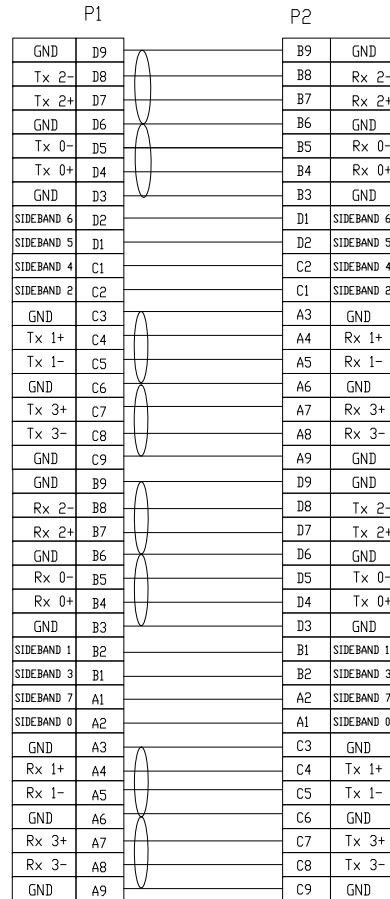

WIRING DIAGRAM

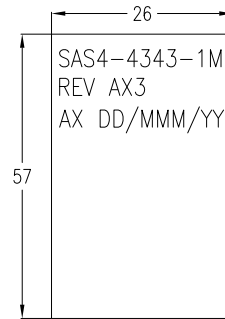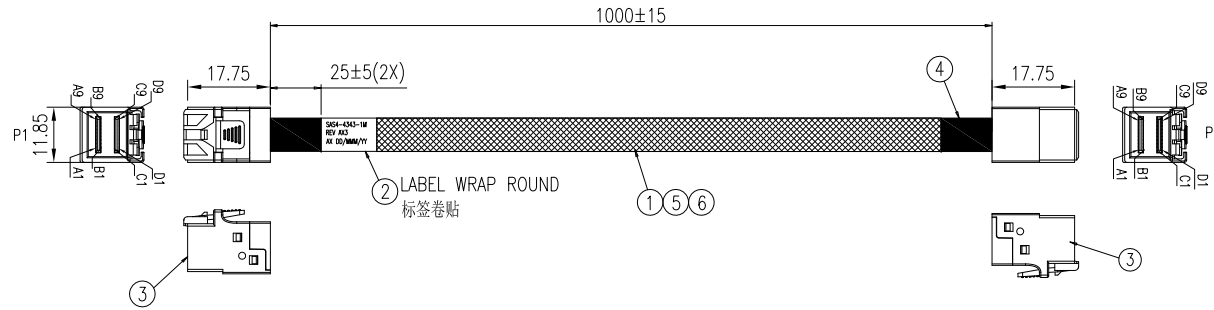

LABEL DETAIL

ITEM	P/N	DESCRIPTION	QTY
6	HMTBDO0501	EXPANDO TUBE:OD=5MM,BLAC K,VW-1,HF	A/R
5	R10610300X	WIRE,30AWG,UL1061,STRANDED	A/R
4	HMMTP00012	ACETATE TAPE:W=1INCH	A/R
3	AST8643-0036-04	HD MINI SAS 36POS SHORT TYPE	2
2	HMLSBS7262	LABEL:57*26MM,BLANK	1
1	HWSS300070	SAS CBL:UL20744,30#1P+2D,SILVER PLATED,VW-1,100ohm,YEL,24G,HF	A/R

GENERAL TOLERANCES

.X:	± 0.5
.XX:	± 0.3
.XXX:	
ANGULAR:	± 2'

This drawing is the property of Serial Cables and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Serial Cables without its prior consent, and that no right is granted to disclose or use any information in this drawing.

DRAWN:	NATHAN CAO	DATE:	11/10/2017
CHECKED:	JUSTIN OU	DATE:	11/10/2017
APPROVED:	KASUN LI	DATE:	11/10/2017



TITLE:		
HD MINI SAS 36P STR TO HD MINI SAS 36P STR		
DWG. No.: RHS36-4814		
SCALE: NONE	SHEET 1 OF 2	
UNIT: MM	SIZE: A4	REV.: AX3