


RoHS

REV.	REMARK	DATE	SIGN.

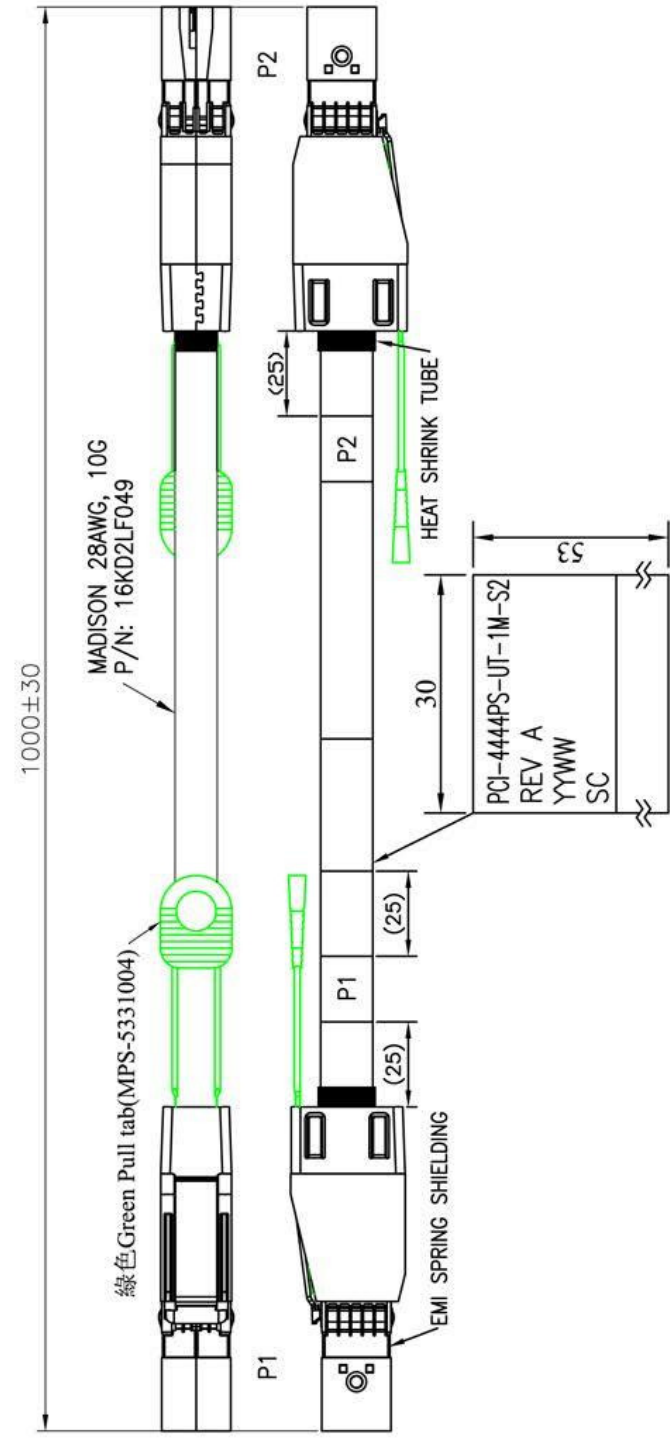

MATERIAL ROHS COMPLIANT:
 1. CABLE:
 CONDUCTOR: 28AWG SOLID SILVER PLATED COPPER.
 INSULATION: FOAM POLYOLEFIN.
 PAIR: 2 SINGLES LAID FLAT AND PARALLEL.
 CORE: 8 PAIRS
 PAIR DRAIN WIRE: 30AWG SOLID TIN PLATED COPPER.
 PAIR SHIELD: ALUMINUM/POLYESTER TAPE. ALUMINUM SIDE FACING IN, 25% OVERLAP.
 INNER SHIELD: ALUMINUM/POLYESTER TAPE, ALUMINUM SIDE FACING OUT, 25% OVERLAP.
 OUTER SHIELD: 38AWG TIN PLATED COPPER BRAID, 85% COVERAGE.
 JACKET: FLEXIBLE PVC, COLOR - BLACK.
 DIAMETER: 7.88±0.25mm
 PRINT LEGEND: *MADISON CABLE {Wfg, Location Code} (UL) TYPE CL2 75°C 28AWG CSA AWM II A/B
 75°C 30V FT4 TurboTwin® SUBSTANCE COMPLIANT 2011/65/EU {D/C}*
 DIFFERENTIAL IMPEDANCE: 100±5 OHMS @TDR
 UL LISTING: TYPE CL2 AS SPECIFIED IN ARTICLE 725 OF THE NATIONAL ELECTRICAL CODE.

2.CONNECTOR:
 P1,P2: Mini SAS HD 4x CABLE PLUG (SFF-8644)
 (1) P.C.B: 4 LAYERS, GOLD PLATING ON CONTACT PADS, WITHOUT CARBON
 (P/N: MPCB-040091LF REV.E / MPCB-040092LF REV.E)
 (2) LATCH: STAINLESS STEEL
 (3) BACKSHELL- ZINC DIE CASTING HOOD/ NICKEL PLATING
 (4) PULL TAB: NYLON UL94V-0, COLOR: GREEN(MPS-5331004)
 (5) EMI SPRING SHIELDING

3. LABELING ON BAG:




DESC.	Mini SAS HD 4x TO Mini SAS HD 4x Cable Ass'y
P/N	B-6345
CUSTOMER P/N	PCI-4444PS-UT-1M-S2

DESIGNED	Sino
CHECKED	
APPROVED	
SCALE	
DATE	03/08/18
DWG NO:	DWG\B\6345

UNIT	mm
DWG NO:	DWG\B\6345

1	2	3	4	5	6	7	8	9
REV.	REMARK	DATE	SIGN.					

CUSTOMER WIRING DIAGRAM *客製化接點

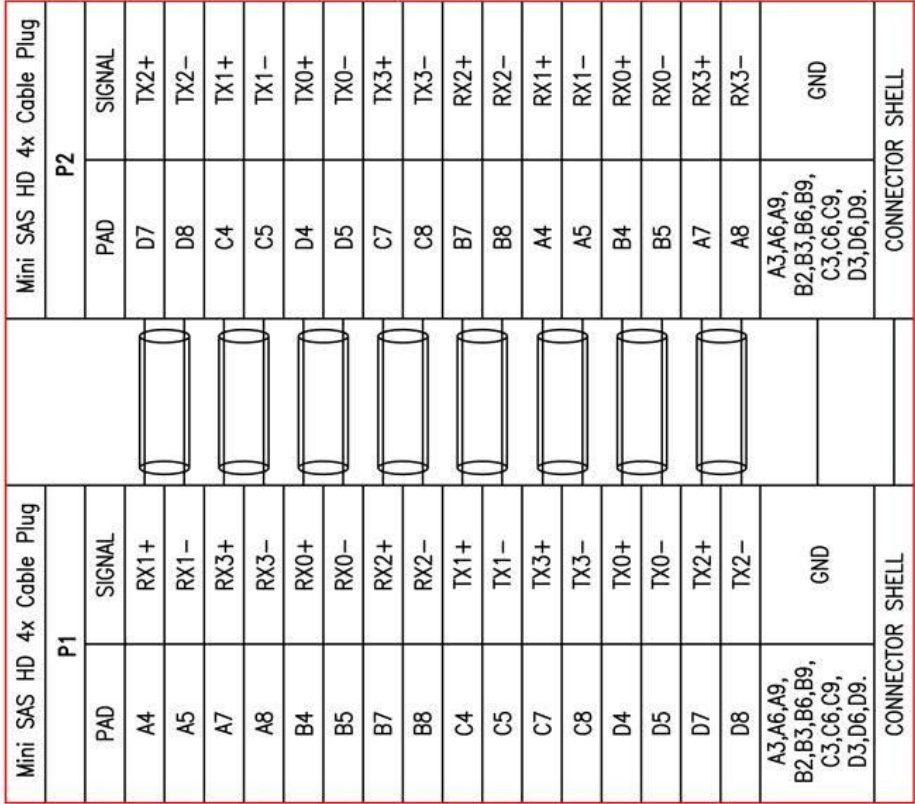

DESC.	Mini SAS HD 4x TO Mini SAS HD 4x Cable Ass'y	APPROVED	CHECKED	DESIGNED	TOLERANCE	SCALE	*	UNIT
P/N	B-6345			Sino		DATE	03/08/18	mm
							DWG NO:	DWG\B\6345