





5	DATE	DESCRIPTION OF CHANGE	REV
	2021-01-11	XXXXXXXX	A

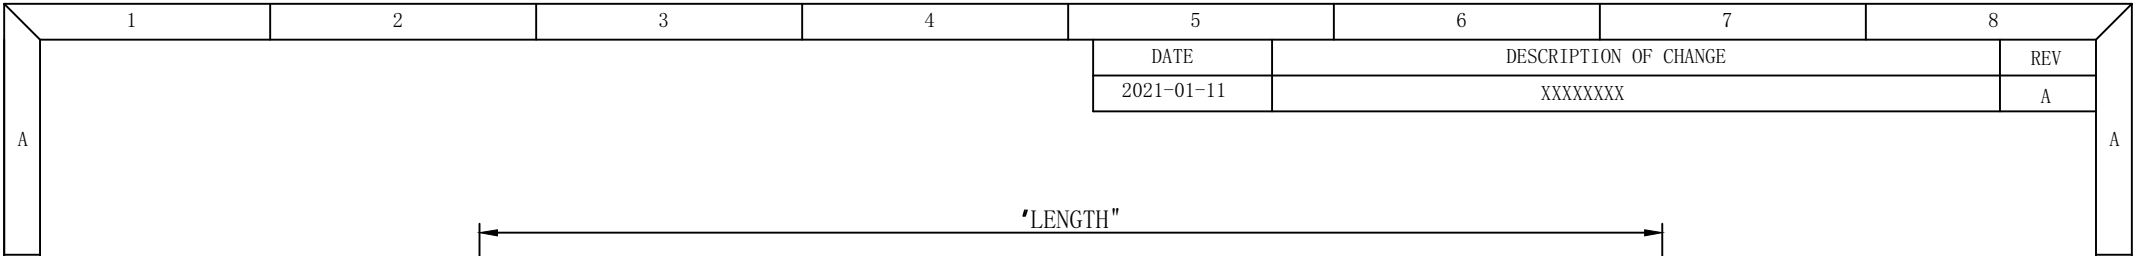


P1



P2

ITEM	CLIENTS/PN	LENGTH
1	SLSP-8X-11X2-0.5M	500 ± 10
2	SLSP-8X-11X2-1M	1000 ± 20

LABEL INFORMATION:

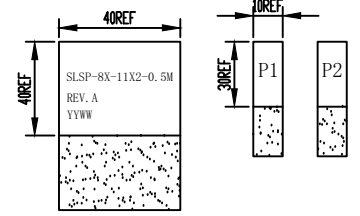

TEST CONDITIONS:

- 1.100% OPEN & SHORT & MISS-WIRING & INTERMITTENCE TEST
- 2.CONDUCTIVE RESISTANCE: 3Ω MAX
- 3.INSULATION RESISTANCE: 10 MΩ
- 4.HI-POT TEST: 300VDC FOR 10ms.
- 5.THIS PRODUCT MEETS PCIE GEN4.







④	LABEL	WHITE LABEL,10*30MM (P1,P2)	2	PCS	
⑨	LABEL	WHITE LABEL,L W=40*40	1	PCS	
⑧	ACETATE TAPE	W=25MM ACETATE TAPE,BLACK	-	MM	
⑦	WEAVE	W=7MM PLASTIC BRAID SLEEVE,PET,BLACK	-	MM	
⑥	Connector	SFF-8611 OCuLink 4I	2	SET	
⑤	LATCH	SFF-8654 LATCH,SUS301 1/2H	1	PCS	
④	Outer Shell	Black core material PBT	-	G	
③	INNER MOLD	Internal Mould material	-	G	
②	PCB	SFF-8654 8i STR PCB, Au 30" Min	1	PCS	
①	CABLE	SAS CABLE: (30AWG*2C+2D)+HM, 85 Ω	-	MM	
NO.	NAME	IPT NO.	DESCRIPTION	Q'TY	UNIT



TITLE	SLIMSAS 8X STR TO 2X OCULINK 4X STR					SHEET	1/2
CUSTOMER		CUSTOMER P/N	SLSP-8X-11X2-0.5M	DRAWING	<i>lupeng</i>		
DWG NO.	WIPT20210511005	UNIT	SCALE	REV	VIEW	CHECKED	<i>lupeng</i>
IPT P/N		mm	NONE	A		APPROVAL	

5	6	7	8
DATE	DESCRIPTION OF CHANGE		REV
2021-05-11	XXXXXXXX		A

WIRING TABLE

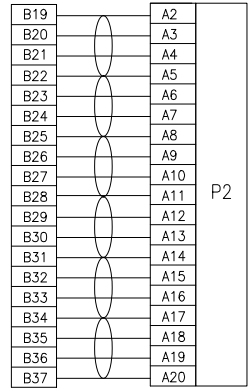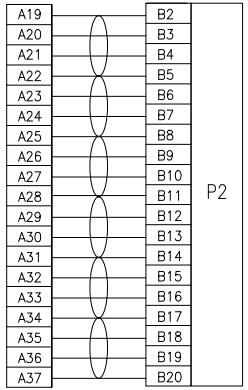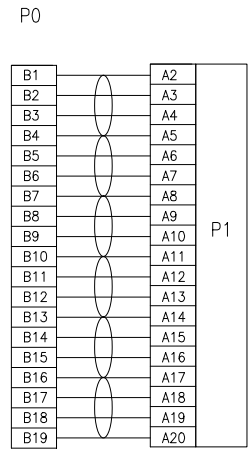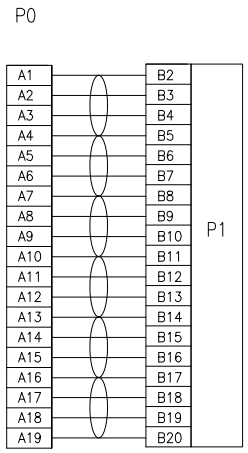

this drawing is the property of Serial Cables and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Serial Cables without its prior consent, and that no right is granted to disclose or use any information in this drawing

							
TITLE	SLIMSAS 8X STR TO 2X OCLINK 4X STR					SHEET	2/2
CUSTOMER		CUSTOMER P/N	SLSP-8X-11X2-0.5M	DRAWING	<i>lupeng</i>		
DWG NO.	WIPT20210511005	UNIT	SCALE	REV	VIEW	CHECKED	<i>lupeng</i>
IPT P/N		mm	NONE	A		APPROVAL	