


1	2	3	4	5	6	7	8	
				DATE	DESCRIPTION OF CHANGE			REV
				2022-09-30	XXX			A

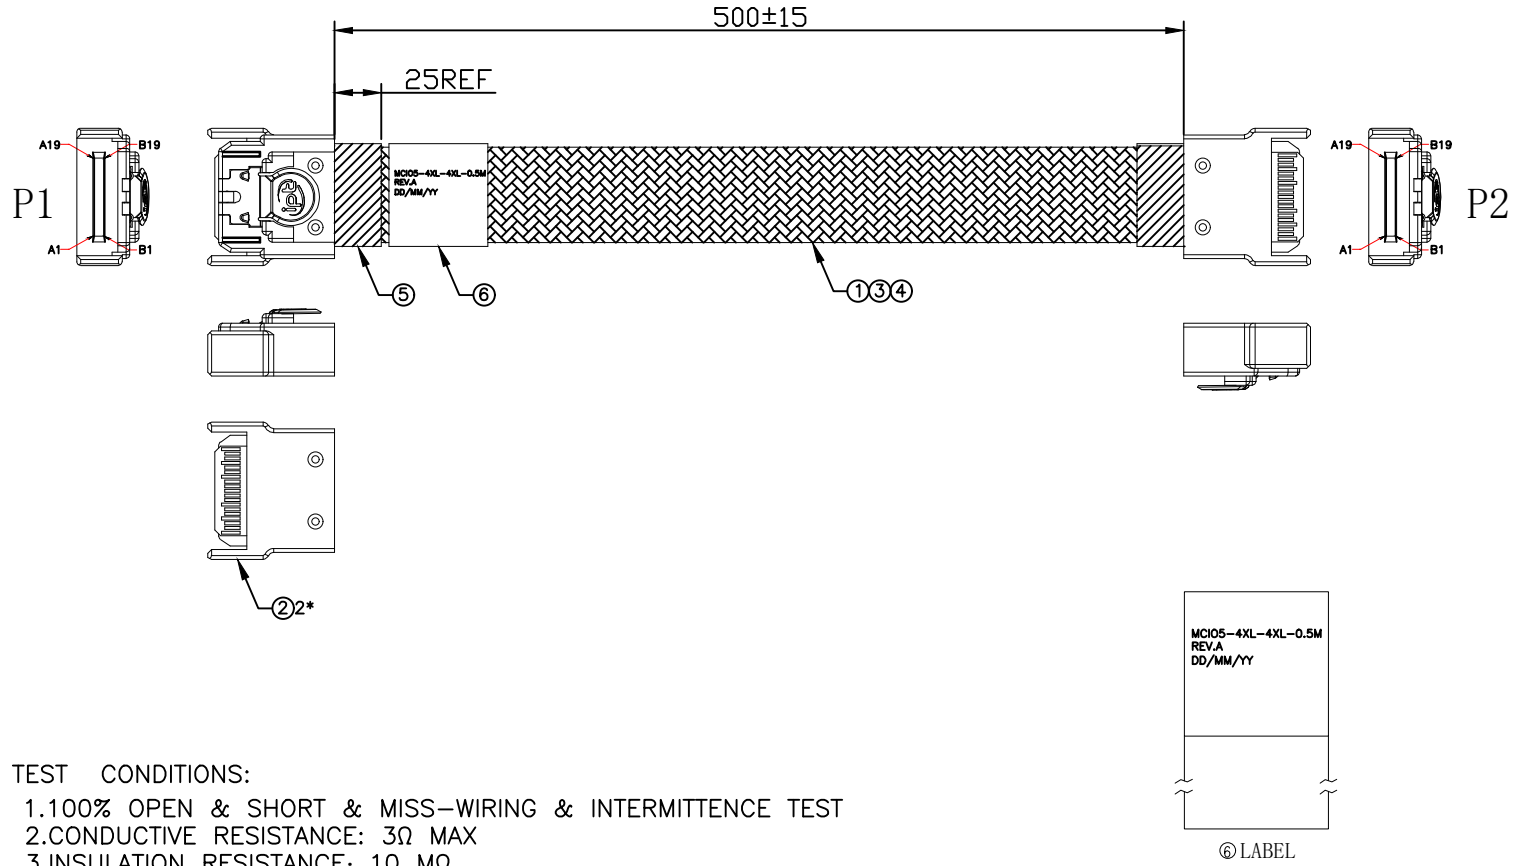

P1		P2	
GND	B19	A19	GND
TX3-	B18	A18	RX3-
TX3+	B17	A17	RX3+
GND	B16	A16	GND
TX2-	B15	A15	RX2-
TX2+	B14	A14	RX2+
GND	B13	A13	GND
SB6	B12	A12	SB6
SB2	B11	A11	SB2
SB8	B10	A10	SB8
SB1	B9	A9	SB1
SB0	B8	A8	SB0
GND	B7	A7	GND
TX1-	B6	A6	RX1-
TX1+	B5	A5	RX1+
GND	B4	A4	GND
TX0-	B3	A3	RX0-
TX0+	B2	A2	RX0+
GND	B1	A1	GND
GND	A19	B19	GND
RX3-	A18	B18	TX3-
RX3+	A17	B17	TX3+
GND	A16	B16	GND
RX2-	A15	B15	TX2-
RX2+	A14	B14	TX2+
GND	A13	B13	GND
SB5	A12	B12	SB5
SB4	A11	B11	SB4
SB9	A10	B10	SB9
SB3	A9	B9	SB3
SB7	A8	B8	SB7
GND	A7	B7	GND
RX1-	A6	B6	TX1-
RX1+	A5	B5	TX1+
GND	A4	B4	GND
RX0-	A3	B3	TX0-
RX0+	A2	B2	TX0+
GND	A1	B1	GND

WIRE DIAGRAM

- TEST CONDITIONS:
- 100% OPEN & SHORT & MISS-WIRING & INTERMITTENCE TEST
 - CONDUCTIVE RESISTANCE: 3Ω MAX
 - INSULATION RESISTANCE: 10 MΩ
 - HI-POT TEST: 300VDC FOR 10ms.
 - THIS PRODUCT MEETS **PCIE 5.0 低损耗**

⑥	LABEL	WHITE LABEL,LW=40*40	1	PCS	
⑤	ACETATE cloth	ACETOUS Tape:25mm WIDE,BLK	-	MM	
④	Nylon net	TPE nylon NMS (56 ingot 0.25*12 mesh single strand) OD: 5-12mm black <ROHS,FR,HF>	-	MM	
③	WIRE	UL1061 30AWG TS-LF-00 (shaft mounted)	-	MM	
②	CONNECTOR	SFF-1016 MCO 4X 74PIN	2	SET	
①	CABLE	29AWG 85Ω HF PCIE: 6.0 低损耗 (P06S62901)	-	MM	
NO.	NAME	IPT NO.	DESCRIPTION	Q'TY	UNIT

								TITLE		MCO 4XL STR TO MICO 4XL STR CABLE 低损耗			SHEET	1/1
CUSTOMER		CUSTOMER P/N		MCO5-4XL-4XL-0.5M	DRAWING		chenlingmin							
DWG NO.	WIPT20220930003	UNIT	SCALE	REV	VIEW	CHECKED	liupeng							
IPT P/N		mm	NONE	C		APPROVAL								

