


NOTES:


- ELECTRICAL AND MECHANICAL PERFORMANCE SHOULD MEET THE PCIE GNE 5 INDUSTRIAL STANDARD.
电气和机械特性满足 PCIE GNE 5 工业标准。
- THE CABLE ASSEMBLY SHOULD BE RoHS2.0/HF COMPLIANT.
该产品符合RoHS2.0/HF.
- THE CABLE ASSEMBLY SHALL MEET BELOW IMPEDANCE REQUIREMENT:
TERMINATION AREA: 85±15% OHMS, CABLE ABSOLUTE AREA: 85±10% OHMS.
该产品满足下面阻抗特性: 接触区域85±15%欧姆, 线材为85±10%欧姆。
- 耐电压DC 300V 10ms, 绝缘10M OHM MIN, 导通阻抗5 OHM MAX,
- Dimensions Marked "▼" Shall Be Checked
标注"▼"的尺寸必须重点检验

DATE	DESCRIPTION OF CHANFE	REV
2023-06-28	△X4 MODIFYING LABEL CONTENT	X4
2023-11-30	△X6 CHANGE CONNECTION RELATIONSHIP	X5

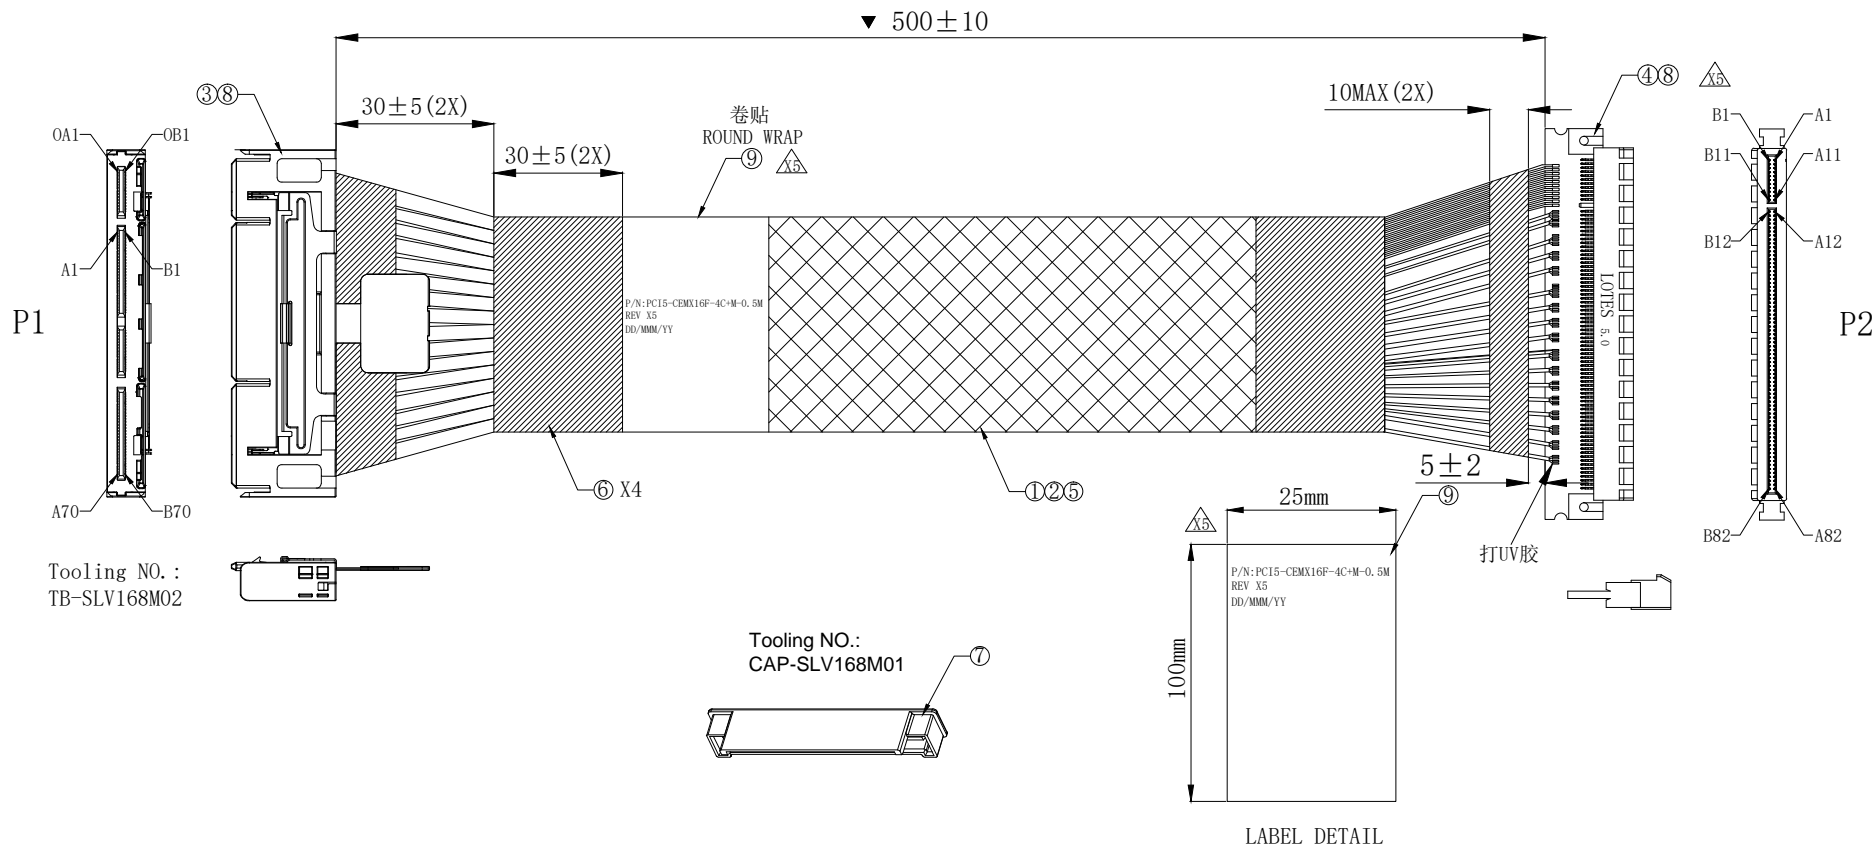



9	LABEL	604100072	空白 白色合成纸材质 25*100mm 耐撕, HF	1	PCS
8	UV GLUE	605011715	UV胶, 型号2620B, 低介电, 50ML, HF	A/R	MM
7	LOW DENSITY PE	602010105	LOW DENSITY PE, QAFCO, FD0474, NATURA, R2	A/R	MM
6	POLYESTER TAPE	6050116XX	POLYESTER TAPE: T-0.12mm, BLACK, VTM-0, R2, HF	A/R	MM
5	EXPANDO TUBE	605041997	EXPANDO TUBE: OD=25mm, BLACK, UL94V-0, R2, HF, 3BFK	A/R	MM
4	CONNECTOR	TBD	X16 CEM FEMALE	1	PCS
3	CONNECTOR	TBD	SLIVER 4C+ M TYPE II PLUG WITH PULL TAPE 85 OHM, PCIE5.0, HF	1	PCS
2	CABLE	60302040X	WIRE: UL3302, 30#, 1/0.254, TINNED, XL-PE, VW-1, OD: 0.55mm, R2, HF,	A/R	MM
1	CABLE	603010264	SAS CBL.: 30#*2C+2EAM, 镀银铜, 85Ω, VW-1, 蓝, HF, P5	A/R	MM
NO.	NAME	P/N	DESCRIPTION	QTY	UNIT

TITLE		GenZ 4C+ Male TO X16 CEM Female 0.5M P5				SHEET	1/3
CUSTOMER	CUSTOMER P/N	PCI5-CEMX16F-4C+M-0.5M		DRAWING	Wanqiu Huang		
	DWG NQ	WIPT818042365	UNIT	SCALE	CHECKED	Shili Yang	
	IPT P/N	mm	NONE	X5	APPROVAL	Zhiyu Chen	



Connection relationship:

DATE	DESCRIPTION OF CHANFE	REV
2023-06-28	△x4 MODIFYING LABEL CONTENT	X4
2023-11-30	△x6 CHANGE CONNECTION RELATIONSHIP	X5

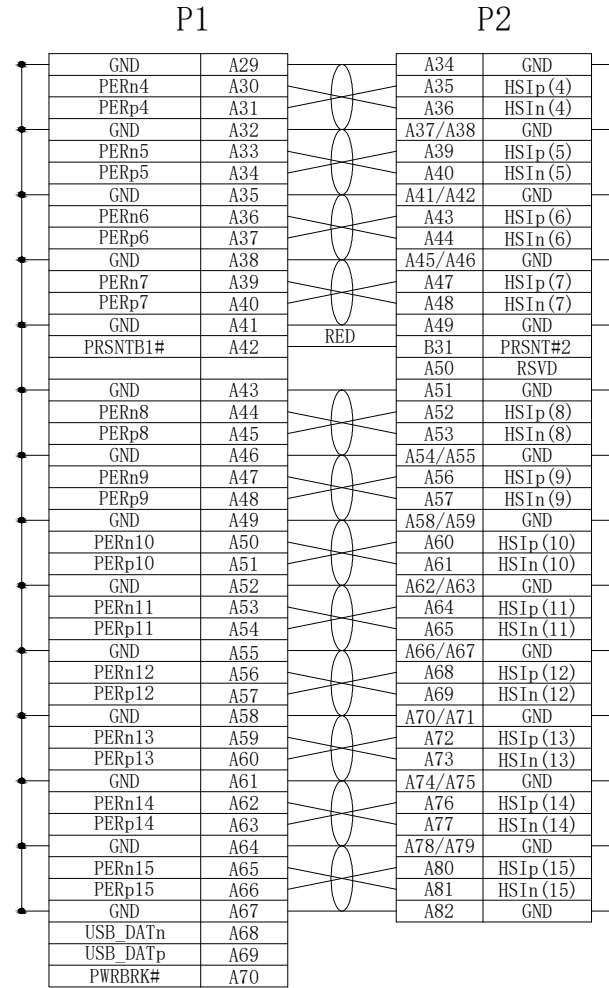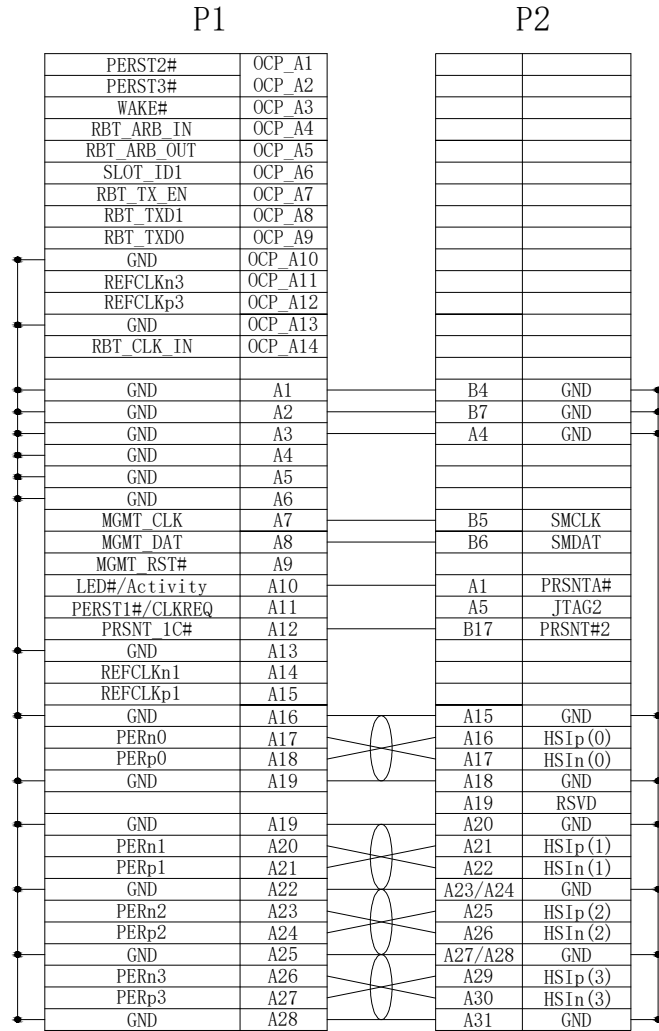

TITLE	GenZ 4C+ Male TO X16 CEM Female 0.5M P5					SHEET	2/3
CUSTOMER		CUSTOMER P/N	PC15-CEMX16F-4C+M-0.5M	DRAWING	Wanqiu Huang		
DWG NQ	WIPT818042365	UNIT	SCALE	REV	VIEW	CHECKED	Shili Yang
IPT P/N		mm	NONE	X5		APPROVAL	Zhiyu Chen

