


RoHS

REV.	REMARK	DATE	SIGN.

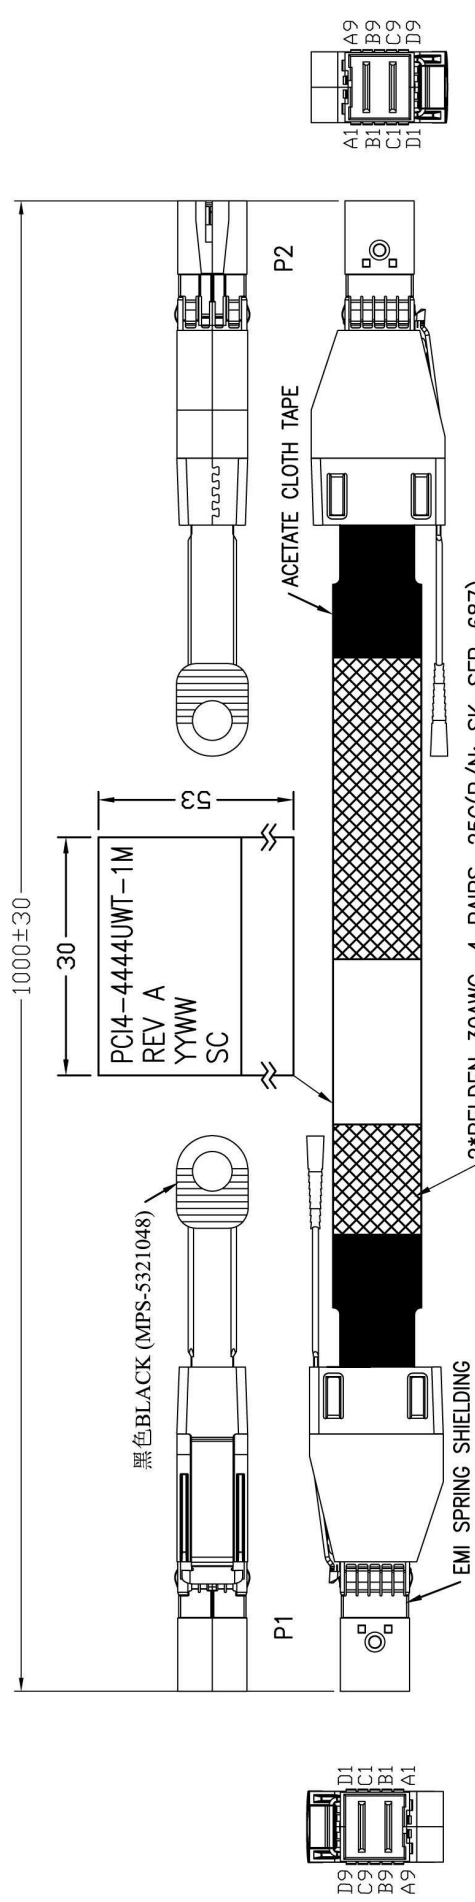

2\*BELDEN 30AWG, 4 PAIRS, 25G(P/N: SK-SFP-687)  
**MADISON 30AWG 1 PAIR, 10G(P/N: 02KB2LF019)**  
 30AWG WIRE(MCB-RC1560001~04) (綠GN,白WH,紅RD,棕BN)  
 (USE 9P+6C cable)

- MATERIAL RoHS COMPLIANT:
- CABLE A: BELDEN 30AWG, 4P, 25G(P/N: SK-SFP-687)  
 CONDUCTOR: 30AWG SILVER PLATED COPPER.  
 8 CORES: 4 PAIRS  
 INSULATION: POLYOLEFIN.  
 DRAIN WIRE: 30AWG SILVER PLATED COPPER.  
 YELLOW SHIELDING TAPE METAL SIDE INWARDS COVERAGE >=100%  
 HOT-MELT PET COVERAGE >=100%  
 BRAID SHIELD: TINNED COPPER COVERAGE >=85%  
 JACKET: PVC  
 OUTER DIAMETER: 5.60±0.35mm  
 MARKING: BELDEN L-Skew 30AZC21-1 E357312-S R  
 AWM STYLE 20276 30AWG 80C 30V VW-1 RoHS YYY/MM/DD XXXXXM
  - CABLE B: **MADISON 30AWG, 10G(P/N: 02KB2LF019)**
  - SIDE BAND: 30AWG WIRE(MCB-RC1560001~04)(USE 6C WIRE)

5.LABELING ON BAG:  
 PCI4-4444UWT-1M  
 Made in Taiwan



DESC.	MiniSASHD 4x with Sideband Cable Assembly	APPROVED	CHECKED	DESIGNED	TOLERANCE	SCALE	*	UNIT
P/N	UA55-RC008959			Sino		DATE	05/09/19	mm
CUSTOMER P/N	PCI4-4444UWT-1M					DWG NO:	DWG\RC\8959	

1	2	3	4	5	6	7	8	9																																																																																																																																																																
REV.	REMARK	DATE	SIGN.																																																																																																																																																																					
<b>CUSTOMER WIRING DIAGRAM</b>																																																																																																																																																																								
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="4">HIGH SPEED SIGNAL</th> <th colspan="4">LOW SPEED CLK &amp; SIGNAL</th> </tr> <tr> <th colspan="2">P1</th> <th colspan="2">P2</th> <th colspan="2">P1</th> <th colspan="2">P2</th> </tr> <tr> <th>PAD</th> <th>SIGNAL</th> <th>PAD</th> <th>SIGNAL</th> <th>PAD</th> <th>SIGNAL</th> <th>PAD</th> <th>SIGNAL</th> </tr> </thead> <tbody> <tr> <td>A4</td> <td>RX1+</td> <td>C4</td> <td>TX1+</td> <td>A1</td> <td>CLK+</td> <td>A2</td> <td>CLK+</td> </tr> <tr> <td>A5</td> <td>RX1-</td> <td>C5</td> <td>TX1-</td> <td>A2</td> <td>CLK-</td> <td>A1</td> <td>CLK-</td> </tr> <tr> <td>A7</td> <td>RX3+</td> <td>C7</td> <td>TX3+</td> <td>B1</td> <td></td> <td>B2</td> <td></td> </tr> <tr> <td>A8</td> <td>RX3-</td> <td>C8</td> <td>TX3-</td> <td>B2</td> <td></td> <td>B1</td> <td></td> </tr> <tr> <td>B4</td> <td>RX0+</td> <td>D4</td> <td>TX0+</td> <td>C1</td> <td></td> <td>C2</td> <td></td> </tr> <tr> <td>B5</td> <td>RX0-</td> <td>D5</td> <td>TX0-</td> <td>C2</td> <td></td> <td>C1</td> <td></td> </tr> <tr> <td>B7</td> <td>RX2+</td> <td>D7</td> <td>TX2+</td> <td>D1</td> <td></td> <td>D2</td> <td></td> </tr> <tr> <td>B8</td> <td>RX2-</td> <td>D8</td> <td>TX2-</td> <td>D2</td> <td></td> <td>D1</td> <td></td> </tr> <tr> <td>C4</td> <td>TX1+</td> <td>A4</td> <td>RX1+</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>C5</td> <td>TX1-</td> <td>A5</td> <td>RX1-</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>C7</td> <td>TX3+</td> <td>A7</td> <td>RX3+</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>C8</td> <td>TX3-</td> <td>A8</td> <td>RX3-</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>D4</td> <td>TX0+</td> <td>B4</td> <td>RX0+</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>D5</td> <td>TX0-</td> <td>B5</td> <td>RX0-</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>D7</td> <td>TX2+</td> <td>B7</td> <td>RX2+</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>D8</td> <td>TX2-</td> <td>B8</td> <td>RX2-</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>GND GROUP</td> <td>GND</td> <td>GND GROUP</td> <td>GND</td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>									HIGH SPEED SIGNAL				LOW SPEED CLK & SIGNAL				P1		P2		P1		P2		PAD	SIGNAL	PAD	SIGNAL	PAD	SIGNAL	PAD	SIGNAL	A4	RX1+	C4	TX1+	A1	CLK+	A2	CLK+	A5	RX1-	C5	TX1-	A2	CLK-	A1	CLK-	A7	RX3+	C7	TX3+	B1		B2		A8	RX3-	C8	TX3-	B2		B1		B4	RX0+	D4	TX0+	C1		C2		B5	RX0-	D5	TX0-	C2		C1		B7	RX2+	D7	TX2+	D1		D2		B8	RX2-	D8	TX2-	D2		D1		C4	TX1+	A4	RX1+					C5	TX1-	A5	RX1-					C7	TX3+	A7	RX3+					C8	TX3-	A8	RX3-					D4	TX0+	B4	RX0+					D5	TX0-	B5	RX0-					D7	TX2+	B7	RX2+					D8	TX2-	B8	RX2-					GND GROUP	GND	GND GROUP	GND				
HIGH SPEED SIGNAL				LOW SPEED CLK & SIGNAL																																																																																																																																																																				
P1		P2		P1		P2																																																																																																																																																																		
PAD	SIGNAL	PAD	SIGNAL	PAD	SIGNAL	PAD	SIGNAL																																																																																																																																																																	
A4	RX1+	C4	TX1+	A1	CLK+	A2	CLK+																																																																																																																																																																	
A5	RX1-	C5	TX1-	A2	CLK-	A1	CLK-																																																																																																																																																																	
A7	RX3+	C7	TX3+	B1		B2																																																																																																																																																																		
A8	RX3-	C8	TX3-	B2		B1																																																																																																																																																																		
B4	RX0+	D4	TX0+	C1		C2																																																																																																																																																																		
B5	RX0-	D5	TX0-	C2		C1																																																																																																																																																																		
B7	RX2+	D7	TX2+	D1		D2																																																																																																																																																																		
B8	RX2-	D8	TX2-	D2		D1																																																																																																																																																																		
C4	TX1+	A4	RX1+																																																																																																																																																																					
C5	TX1-	A5	RX1-																																																																																																																																																																					
C7	TX3+	A7	RX3+																																																																																																																																																																					
C8	TX3-	A8	RX3-																																																																																																																																																																					
D4	TX0+	B4	RX0+																																																																																																																																																																					
D5	TX0-	B5	RX0-																																																																																																																																																																					
D7	TX2+	B7	RX2+																																																																																																																																																																					
D8	TX2-	B8	RX2-																																																																																																																																																																					
GND GROUP	GND	GND GROUP	GND																																																																																																																																																																					
<p>GND GROUP 1: P1-A3,A6,A9,B3,B6,B9. P2-C3,C6,C9,D3,D6,D9.</p> <p>GND GROUP 2: P1-C3,C6,C9,D3,D6,D9. P2-A3,A6,A9,B3,B6,B9.</p>																																																																																																																																																																								
CONNECTOR SHELL				CONNECTOR SHELL																																																																																																																																																																				
*客製化接點																																																																																																																																																																								
DESC. MiniSASHD 4x with Sideband Cable Assembly		APPROVED	CHECKED	DESIGNED	TOLERANCE	SCALE	*	UNIT																																																																																																																																																																
P/N	UASS-RC008959	CUSTOMER P/N		Sino		DATE	05/10/19	DWG NO: DWG\RC\8959																																																																																																																																																																

